

## 96643904 TR 72L50-740 RWT BP CL2 OP W9 T60E

ISO 9223 C5	IP66	IK08							T <sub>a</sub> 0 +25	
----------------	------	------	--	--	--	--	--	--	-------------------------	--


### Thor

A large size, smart urban LED lantern with 72 LEDs driven at 500mA with Wet Road optic and UV stabilised polycarbonate dome with opal finish. Class II electrical, IP66, IK08. Body, bracket and ring: die-cast aluminium (AS12U, LM6 equivalent, EN AC-44300) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 4mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 9m cable. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: Ø577 x 155 mm  
 Luminaire input power: 115 W  
 Luminaire luminous flux: 15229 lm  
 Luminaire efficacy: 132 lm/W  
 Weight: 14.6 kg  
 Scx: 0.044 m<sup>2</sup>



TLG\_THRL\_F\_MLEOP0.jpg

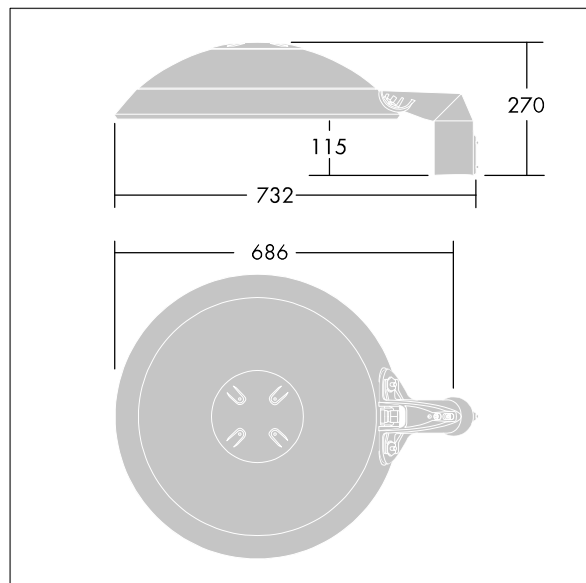

TLG\_THOR\_M\_PTOP.wmf

This product contains light sources of energy efficiency class E.

**Thor**

**96643904 TR 72L50-740 RWT BP CL2 OP W9 T60E**

**THORN**