

96643909 TR 72L50-740 SC BP CL1 OP W9 T60E

ISO 9223 C5	IP66	IK08							T _a 0 +25	
----------------	------	------	--	--	--	--	--	--	-------------------------	--


Thor

A large size, smart urban LED lantern with 72 LEDs driven at 500mA with Street & Comfort optic and UV stabilised polycarbonate dome with opal finish. Class I electrical, IP66, IK08. Body, bracket and ring: die-cast aluminium (AS12U, LM6 equivalent, EN AC-44300) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 4mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 9m cable. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: Ø577 x 155 mm
 Luminaire input power: 115 W
 Luminaire luminous flux: 15720 lm
 Luminaire efficacy: 137 lm/W
 Weight: 14.6 kg
 Scx: 0.044 m²



TLG_THRL_F_MTPOP0.jpg

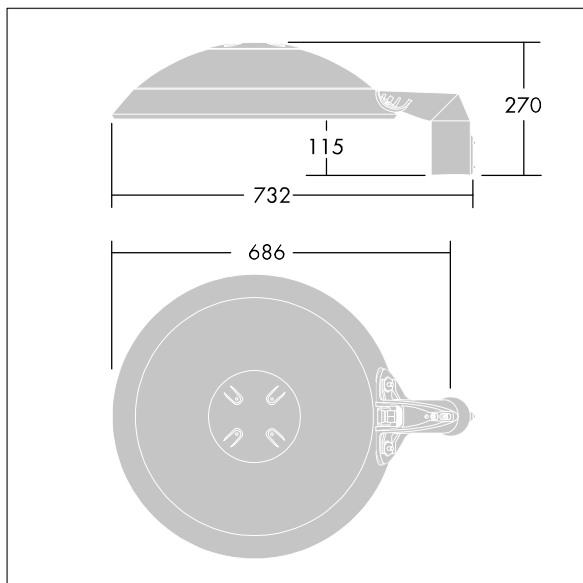

TLG_THOR_M_PTOP.wmf

This product contains light sources of energy efficiency class E.

Thor

96643909 TR 72L50-740 SC BP CL1 OP W9 T60E

THORN