

96643964 TR 72L50-740 RWT BP CL2 FD W9 L60E

| | | | | | | | | | | |
|----------------|------|------|--|--|--|--|--|--|-------------------------|--|
| ISO 9223 C5 | IP66 | IK08 | | | | | | | T _a 0 +25 | |
|----------------|------|------|--|--|--|--|--|--|-------------------------|--|


Thor

A large size, smart urban LED lantern with 72 LEDs driven at 500mA with Wet Road optic and UV stabilised polycarbonate dome with anthracite finish (close to RAL7043). Class II electrical, IP66, IK08. Body, bracket and ring: die-cast aluminium (AS12U, LM6 equivalent, EN AC-44300) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 4mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 9m cable. Side entry mounting to Ø60mm spigot, tilt 0°, adjustable from -15° to +10°. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: Ø577 x 155 mm
 Luminaire input power: 109 W
 Luminaire luminous flux: 15791 lm
 Luminaire efficacy: 145 lm/W
 Weight: 14.8 kg
 Scx: 0.044 m²



TLG_THRL_F_MLEFD0.jpg

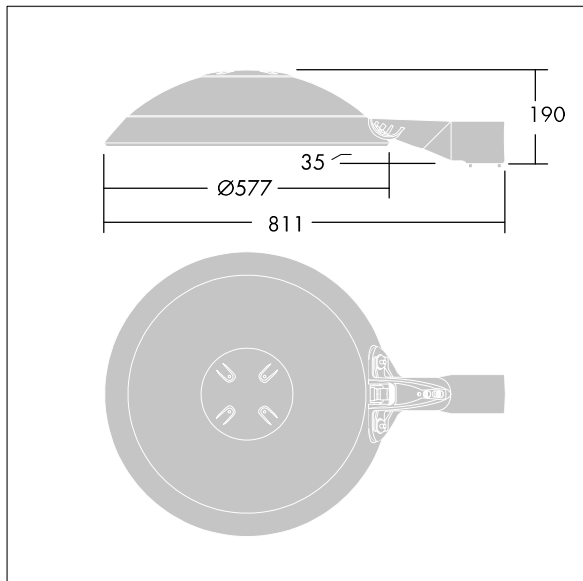

TLG_THOR_M_BRK.wmf

This product contains light sources of energy efficiency class E.