

CB	IP20 IP44	IK03	CE	CE	650°C	T _a -20 +25
----	--------------	------	----	----	-------	---------------------------


IQ Wave

Recessed modular, direct LED luminaire. Electronic, fixed output control gear. Class I electrical, IP44_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Supplied with safety wire. With integral motion sensor for on/off control. Complete with 4000K LED

Dimensions: 597 x 597 x 97 mm
Luminaire input power: 40 W
Luminaire luminous flux: 4250 lm
Luminaire efficacy: 106 lm/W
Weight: 3.8 kg



TLG_IQWV_F_PDB.jpg

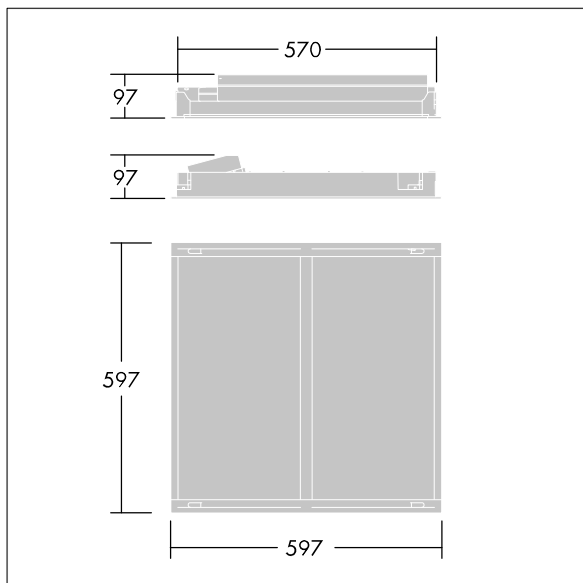

TLG_IQWV_M_600.wmf

This product contains a light source of energy efficiency class D.

IQ Wave

92900318 IQ WAVE LED4100-840 HF MWS Q597 MRG

THORN