

## 92900321 IQ WAVE LED4100-840 HFIX Q622 MRE

|    |  |                |      |  |    |  |  |       |                           |  |
|----|--|----------------|------|--|----|--|--|-------|---------------------------|--|
| CB |  | IP20<br>↑ IP44 | IK03 |  | CE |  |  | 650°C | T <sub>a</sub> -20<br>+25 |  |
|----|--|----------------|------|--|----|--|--|-------|---------------------------|--|


### IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear. Class I electrical, IP44 \_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Dimensions: 622 x 622 x 97 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4250 lm  
Luminaire efficacy: 106 lm/W  
Weight: 4.5 kg



TLG\_IQWV\_F\_PDBCEILING.jpg

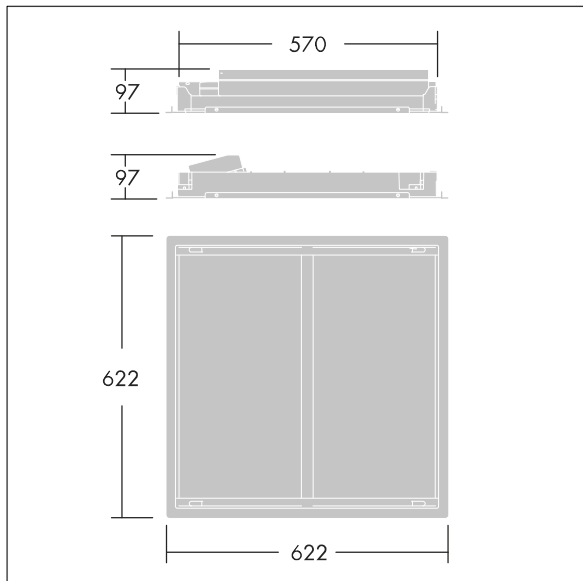

TLG\_IQWV\_M\_625.wmf

This product contains a light source of energy efficiency class D.

**IQ Wave**

**92900321 IQ WAVE LED4100-840 HFIX Q622 MRE**

**THORN**