

# Thor

# THORN

**96665352 TR 24L105 740 WS-S LRT CL2 FD MCA ANT**

|                |   |           |   |   |   |   |   |                   |
|----------------|---|-----------|---|---|---|---|---|-------------------|
| ISO 9223<br>C5 |  | IP66 IK10 |  |  |  |  |  | T <sub>a</sub> 25 |
|----------------|---|-----------|---|---|---|---|---|-------------------|

## Thor

A small size, smart urban LED lantern with 24 LEDs driven at 1,05A with wide street symmetrical optic and die-cast aluminium EN AC 47100 + CAT dome with anthracite finish (close to RAL7043). Class II electrical, IP66, IK10. Body: die-cast aluminium (EN AC 46100) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 6mm toughened flat glass. Screws and closing set: stainless steel. Catenary mounted Equipped with power reduction circuit, controlled by an additional switched phase cable. ON = 100%, OFF = 50%. Complete with 4000K LED.

Dimensions: Ø459 x 261 mm

Luminaire input power: 79 W

Luminaire luminous flux: 10114 lm


Luminaire efficacy: 128 lm/W

Weight: 8.6 kg

Scx: 0.035 m<sup>2</sup>



TLG\_THOR\_F\_SMCA.jpg

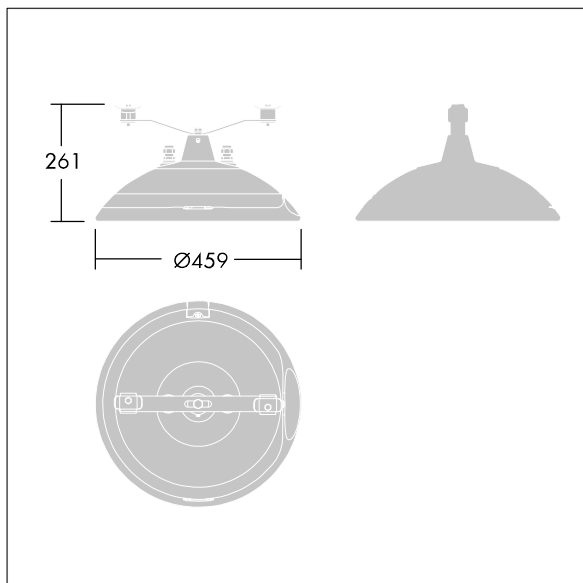

TLG\_THOR\_M\_MCA.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Thor**

**96665352 TR 24L105 740 WS-S LRT CL2 FD MCA ANT**

**THORN**