

## 96628655 CQ 24L50 740 EWR BS 3550 CL2 M76 ANT

|    |                |                |      |      |  |    |     |  |  |      |
|----|----------------|----------------|------|------|--|----|-----|--|--|------|
| CB | ISO 9223<br>C5 | PLUG<br>* 11 * | IP66 | IK08 |  | CE | EAC |  |  | Ta25 |
|----|----------------|----------------|------|------|--|----|-----|--|--|------|

### CiviTEQ

A small size LED road lighting lantern with 24 LEDs driven at 500mA with Extra Wide Road optic. Electronic, fixed output control gear. Class II electrical, IP66, IK08. Housing: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006). Enclosure: toughened flat glass. White framed with etched border. Screws: stainless steel, Ecolubric® treated. Supplied with Ø76mm spigot adaptor which can be fitted for post-top (0°/5°/10° tilt) or side-entry (-20°/-15°/-10°/-5°/0° tilt). Equipped with power reduction circuit, activated by internal link. Complete with 4000K LED. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 390 x 230 x 133 mm

Luminaire input power: 38 W

Luminaire luminous flux: 5669 lm


Luminaire efficacy: 149 lm/W

Weight: 5.6 kg

Scx: 0.077 m²



TLG\_CTEQ\_F\_SMTP36LEDPDB.jpg

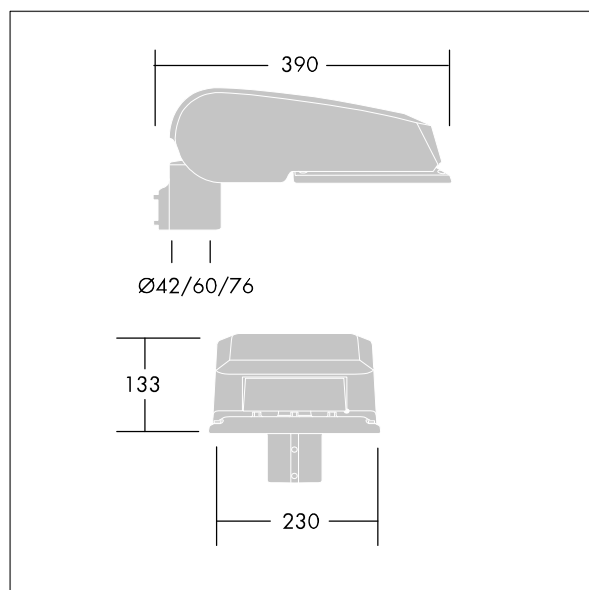

TLG\_CETQ\_M\_S.wmf

This product contains light sources of energy efficiency class D.