

92900411 IQ WAVE LED4100-830 HFIX E3TX Q622 MRE

↓ IP20 ↑ IP44	IK03	⊕	CE	⚡	⚙️	⚙️	⚙️	650°C	T _a 0 +25	
------------------	------	---	----	---	----	----	----	-------	-------------------------	--


IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP44_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 3000K LED

Dimensions: 622 x 622 x 97 mm
 Luminaire input power: 40 W
 Luminaire luminous flux: 4050 lm
 Luminaire efficacy: 101 lm/W
 Weight: 5.1 kg



TLG_IQWV_F_PDB.jpg

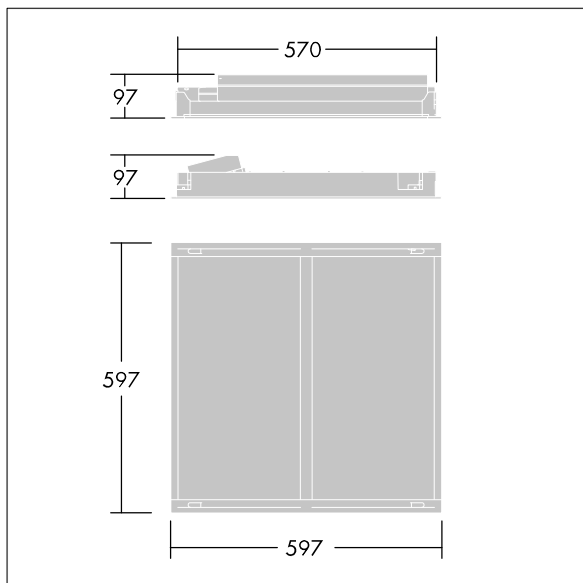

TLG_IQWV_M_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

IQ Wave

92900411 IQ WAVE LED4100-830 HFIX E3TX Q622 MRE

THORN