

## 92900412 IQ WAVE LED4100-840 HFIX E3TX Q622 MRE

|                  |      |   |    |   |    |    |       |                         |  |
|------------------|------|---|----|---|----|----|-------|-------------------------|--|
| ↓ IP20<br>↑ IP44 | IK03 | ⊕ | CE | ⚡ | ⚙️ | ⚙️ | 650°C | T <sub>a</sub> 0<br>+25 |  |
|------------------|------|---|----|---|----|----|-------|-------------------------|--|


### IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Dimensions: 622 x 622 x 97 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4250 lm  
Luminaire efficacy: 106 lm/W  
Weight: 5.1 kg



TLG\_IQWV\_F\_PDB.jpg

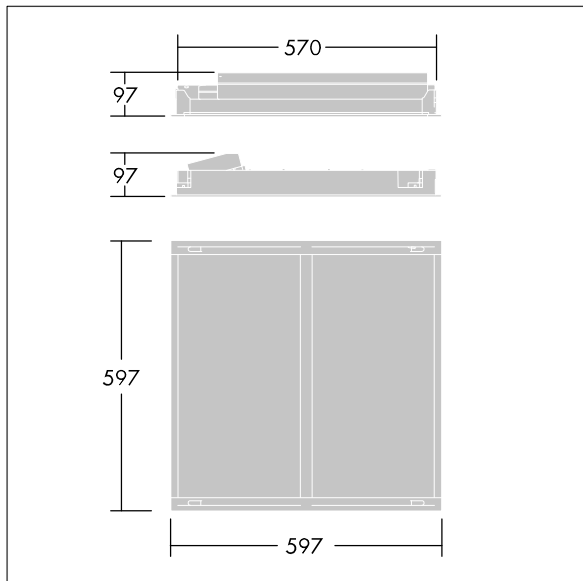

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.