


# Alumet Stage II

96275341 ALUMET ST SPOT 4L105MAX 12° 840

THORN

## Alumet Stage II

LED spot module for Alumet Stage II LED. With 12° beam, white.

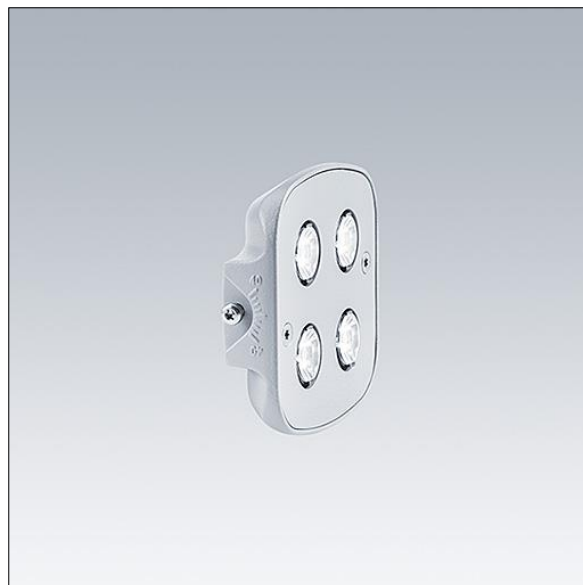

TLG\_ALS2\_F\_SPOT.jpg

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Alumet Stage II

96275341 ALUMET ST SPOT 4L105MAX 12° 840

THORN