

96629827 CQ 24L50 740 NR CLO BS 3550 CL2 M76 ANT

CB	ISO 9223 C5	PLUG * 11 *	11	IP66	IK08		CE		EAC			Ta25	
----	----------------	----------------	----	------	------	--	----	--	-----	--	--	------	--

## CiviTEQ

A small size LED road lighting lantern with 24 LEDs driven at 500mA with Narrow Road optic. Electronic, fixed output control gear. Class II electrical, IP66, IK08. Housing: die-cast aluminium (EN AC-44300), powder coated anthracite (close to RAL7043). Enclosure: toughened flat glass. White framed with etched border. Screws: stainless steel, Ecolubric® treated. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 4000K LED. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 390 x 230 x 133 mm

Luminaire input power: 36.3 W

Luminaire luminous flux: 5949 lm


Luminaire efficacy: 164 lm/W

Weight: 5.5 kg

Scx: 0.077 m²



TLG\_CTEQ\_F\_SMTP76ANTPDB.jpg

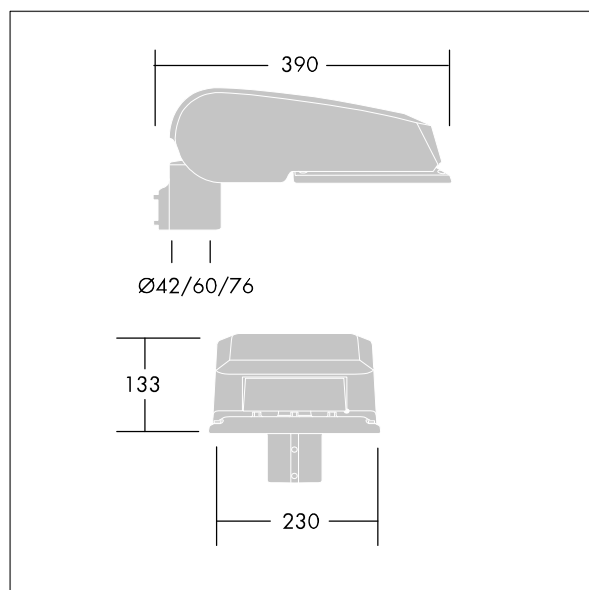

TLG\_CETQ\_M\_S.wmf

This product contains light sources of energy efficiency class D.