

Equaline Mini

96630780 EQUAMINI L580 LED1900-830 HFX SD

THORN

| | | | | | | | | | |
|------|------|---|---|---|---|---|---|---|--|
| IP20 | IK06 |  |  |  |  |  |  |  | |
|------|------|---|---|---|---|---|---|---|--|


Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, DALI dimmable control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via end-cap feed in (SD). Continuous linking possible. Complete with 3000K LED

Dimensions: 580 x 37 x 60 mm
Luminaire input power: 17.8 W
Luminaire luminous flux: 2058 lm
Luminaire efficacy: 116 lm/W
Weight: 0.75 kg



TLG_EQUM_F_SS.jpg

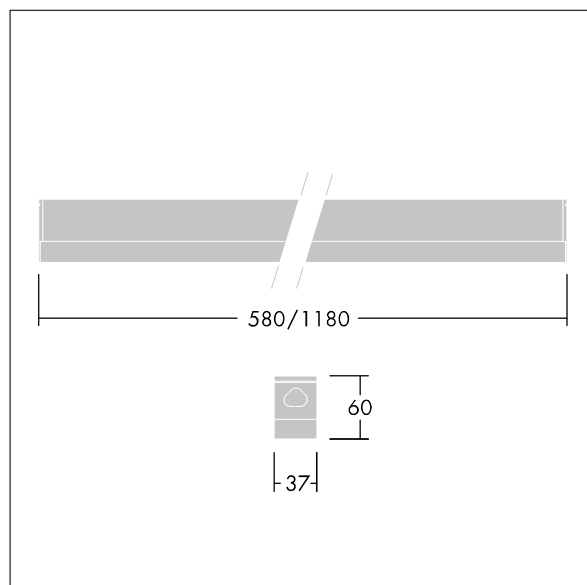

TLG_EQUM_M_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Equaline Mini

96630780 EQUAMINI L580 LED1900-830 HFX SD

THORN