

Equaline Mini

96630782 EQUAMINI L580 LED2100-840 HFX SD

IP20 IK06        T_a35


Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, DALI dimmable control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via end-cap feed in (SD). Continuous linking possible. Complete with 4000K LED

Dimensions: 580 x 37 x 60 mm
 Luminaire input power: 18.8 W
 Luminaire luminous flux: 2189 lm
 Luminaire efficacy: 116 lm/W
 Weight: 0.75 kg



TLG_EQUM_F_SS.jpg

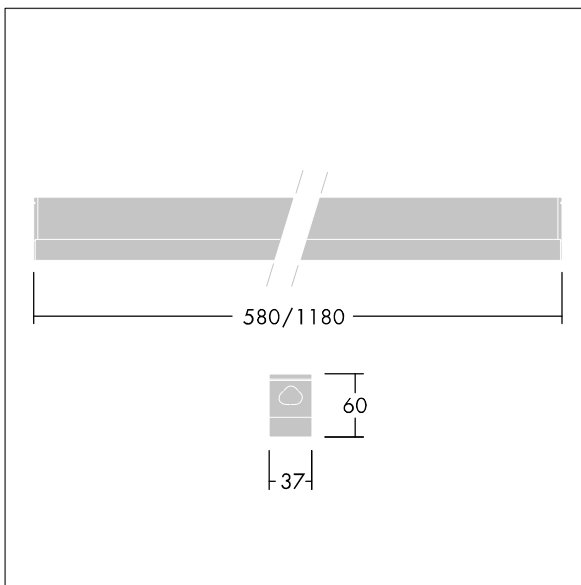

TLG_EQUM_M_LD1.wmf

This product contains a light source of energy efficiency class C.

Equaline Mini

96630782 EQUAMINI L580 LED2100-840 HFX SD

THORN