








96631842 KAT SQ 2000-840 MWS

	IP65		IK10					850°C		T _a -15 +35
-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-----------------------------------------------------------------------------------	---------------------------

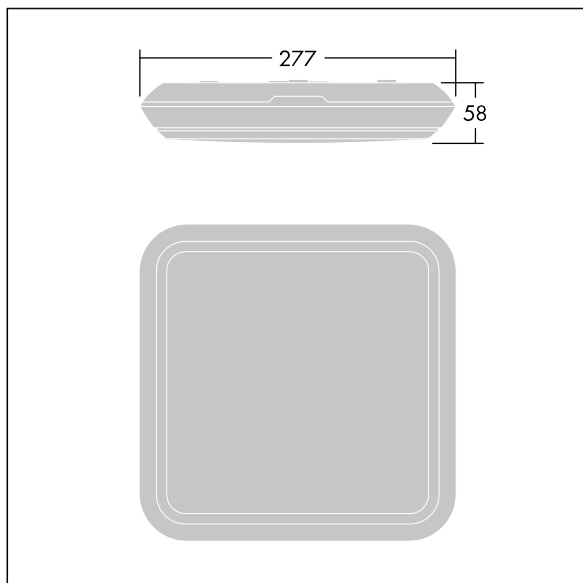
Katona

A very slim, square functional LED luminaire. Fixed output LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. With integral motion sensor for on/off control. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.

Dimensions: 277 x 277 x 58 mm
 Luminaire input power: 16.3 W
 Luminaire luminous flux: 1950 lm
 Luminaire efficacy: 120 lm/W
 Weight: 1.07 kg



TLG_KATO_F_SQ_PDB.jpg



TLG_KATO_M_SQ_LDS.wmf

This product contains a light source of energy efficiency class C.

Katona

96631842 KAT SQ 2000-840 MWS

THORN