








## 92905584 KAT SQ 1400-840 COR MWS

	IP65		IK10						850°C	T <sub>a</sub> -15 +35	
---	------	---	------	---	---	---	---	---	-------	---------------------------	--

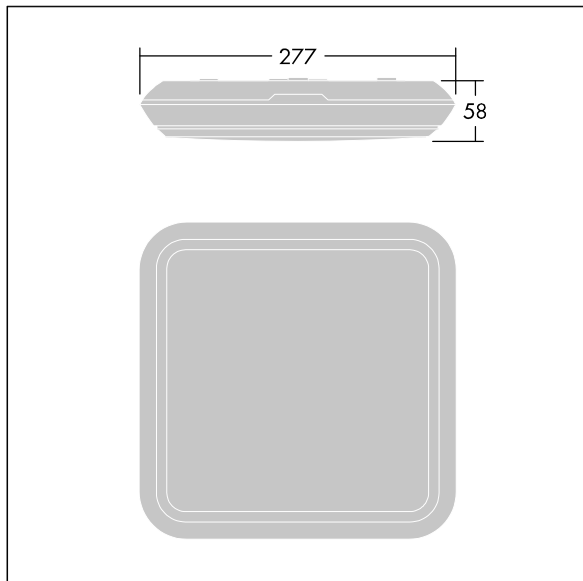
### Katona

A very slim, square functional LED luminaire. Fixed output LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. With integral motion sensor for corridor function control (master). Complete with 3000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm<sup>2</sup>. BESA compatible.

Dimensions: 277 x 277 x 58 mm  
 Luminaire input power: 11.7 W  
 Luminaire luminous flux: 1400 lm  
 Luminaire efficacy: 120 lm/W  
 Weight: 1.11 kg



TLG\_KATO\_F\_SQ\_PDB.jpg



TLG\_KATO\_M\_SQ\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Katona**

**92905584 KAT SQ 1400-840 COR MWS**

**THORN**