

CB		IP20 ↑ IP44	IK03		CE			650°C	T _a -20 +25	
----	--	----------------	------	--	----	--	--	-------	---------------------------	--

IQ Wave


Recessed modular, direct LED luminaire. Electronic, dimmable control gear, Wireless connection via app with Bluetooth® 4.x - basicDIM Wireless , (installation in metal ceilings not allowed). Luminaire arrangement: Mobile control to luminaire max. 15 m, luminaire to luminaire max. 4 m (centre). Class I electrical, IP44 IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Supplied with safety wire. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 97 mm
Luminaire input power: 40 W
Luminaire luminous flux: 4250 lm
Luminaire efficacy: 106 lm/W
Weight: 3.8 kg



TLG_IQWV_F_PDBCEILING.jpg

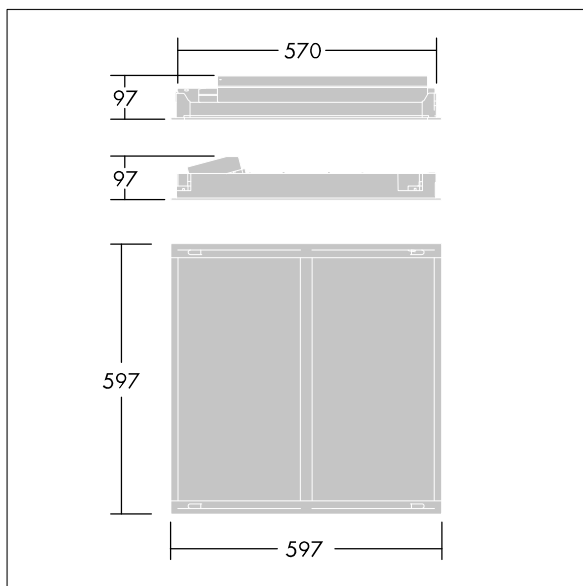

TLG_IQWV_M_600.wmf

This product contains a light source of energy efficiency class D.

IQ Wave

92906193 IQ WAVE LED4100-840 BC Q597 MRG

THORN