

# Raze Architectural

96632100 RAA L 1L50-830 HFX 6K MWA ANT

THORN

ISO 9223	IP66	IK10		CE					
C5									

## Raze Architectural

A compact, wall mounted, LED wall grazer, incorporating Thorn's Flat beam® technology. 1 LED driven at 500mA. Integral DALI dimmable LED driver included. Class II electrical, IP66, IK08. Housing: die-cast aluminium (EN44300, compatible with seaside installation), powder coated, textured anthracite (close to RAL7043). Bowl: UV stabilised polycarbonate, semi-frosted. Fasteners: stainless steel. Complete with 3000K LED.

S version driver capable of supplying up to three luminaires.

MSF variant with adjustable tilt up to  $\pm 15^\circ$ .

MWA variant flush mounting.

6kV surge protection as standard. Pre-wired.

Dimensions: 172 x 147 x 220 mm

Luminaire input power: 21 W


Luminaire luminous flux: 1688 lm

Luminaire efficacy: 80 lm/W

Weight: 2.77 kg



TLG\_RAZA\_F\_L\_PDB.jpg

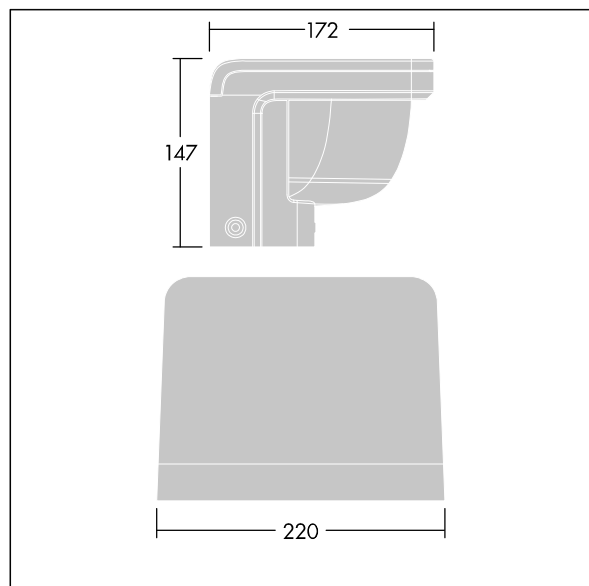

TLG\_RAZA\_M\_L\_MWA.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of  $25^\circ\text{C}$ .

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Raze Architectural**

**96632100 RAA L 1L50-830 HFX 6K MWA ANT**

**THORN**