

IQ Wave SP

THORN

92906330 IQ SUSP S LED4900-840 BC E3 ML4 WH

| | | | | | | | | | |
|------|------|---|----|---|---|---|---|-------|-------------------------|
| IP20 | IK05 | ⊕ | CE | ⚠ | ⚠ | ⚠ | ⚠ | 650°C | T _a 0 +25 |
|------|------|---|----|---|---|---|---|-------|-------------------------|

IQ Wave SP


A lightweight, Suspended, LED luminaire with MV Tech optic. Electronic, dimmable control gear, Wireless connection via app with Bluetooth® 4.x - basicDIM Wireless with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP20, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Fitted with 4 core cable of 2, 5m length. Complete with 3000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1140 x 210 x 70 mm
Luminaire input power: 42 W
Luminaire luminous flux: 4900 lm
Luminaire efficacy: 117 lm/W
weight: 5.1 kg



TLG_IQSU_F_SUS_PDB.jpg

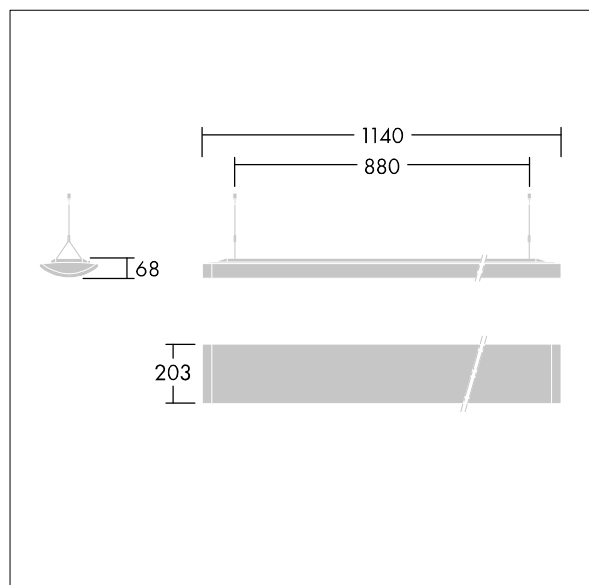

TLG_IQSU_M_SUS.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Wave SP

92906330 IQ SUSP S LED4900-840 BC E3 ML4 WH

THORN