Cesar Wall

96632332 CESAR W 90 2X3L50 940 NB

IP65 | IK08 | Ta -25 +40

Cesar Wall

A wall mounted, architectural LED luminaire for decorative facade lighting, with 2 window, narrow distribution. 6 LEDS driven at 500mA. Fixed output LED driver. Class I electrical, IP65, IK08. Housing: die-cast aluminium, powder coated textured anthracite (close to RAL7043). Working ambient temperature: -25°C to +40°C. Complete with 4000K LED.

Dimensions: 145 x 250 x 90 mm
Luminaire input power: 12 W
Luminaire luminous flux: 923 lm
Luminaire efficacy: 77 lm/W
Weight: 1.8 kg

TLG_CESA_F_W90.jpg

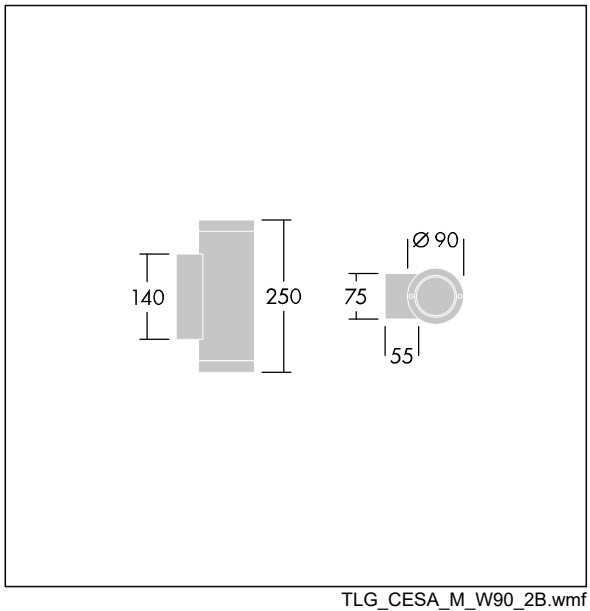

TLG_CESA_M_W90_2B.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Cesar Wall

96632332 CESAR W 90 2X3L50 940 NB

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting