Cesar Wall

96632344 <CESAR W 140 2X5L90 927 MB

IP65 | IK08 | Ta -25 +40

Cesar Wall

A wall mounted, architectural LED luminaire for decorative facade lighting, with 2 window, medium distribution. 10 LEDS driven at 900mA. Fixed output LED driver. Class I electrical, IP65, IK08. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -25°C to +40°C. Complete with 2700K LED.

Dimensions: 210 x 450 x 140 mm
Luminaire input power: 32 W
Luminaire luminous flux: 1756 lm
Luminaire efficacy: 55 lm/W
Weight: 4.7 kg

TLG_CESA_F_W140.jpg

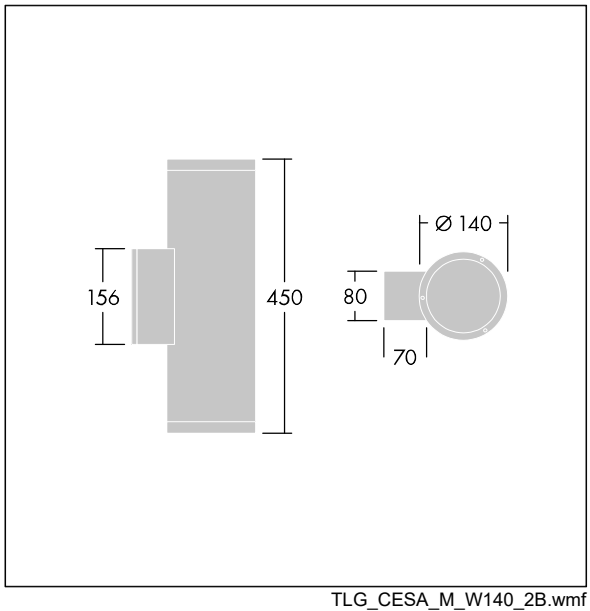

TLG_CESA_M_W140_2B.wmf

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Cesar Wall

96632344 <CESAR W 140 2X5L90 927 MB

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting