

## 96633103 LEDFIT S 45W A/S CL1 L830




### LED Fit

A simple, ultra lightweight, small LED area floodlight with true asymmetric optic. Integral fixed output control gear. Class I electrical, IP66, Impact strength: IK07. Body: die-cast aluminium Light grey 150 sanded textured (close to RAL9006). Stirrup: aluminium. Visor: polycarbonate with external surface powder coated Light grey 150 sanded textured (close to RAL9006). Pre-wired with 0.6m cable. Stirrup can be fixed by one M10 and/or two M8 fixation points, it is reversible allowing different mounting positions. Complete with 3000K LED.

Dimensions: 181 x 236 x 48 mm  
 Luminaire input power: 45 W  
 Luminaire luminous flux: 4300 lm  
 Luminaire efficacy: 96 lm/W  
 weight: 1.7 kg



TLG\_LED\_F\_SPDB.jpg

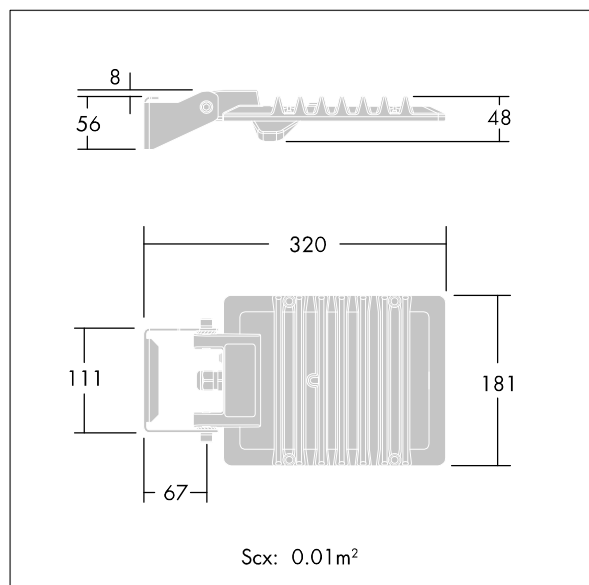

TLG\_LED\_F\_M\_45W.wmf

This product contains a light source of energy efficiency class E.