

Omega Pro 2

92913229 OP2 3800-927-65 CKIT+ HX BC PIR Q600

THORN


CB	IEC EN 60598-1 RG 0			IP20 ↑ IP40	IK03		CE			650°C	T _a 0 +35
----	---------------------------	--	--	----------------	------	--	----	--	--	-------	-------------------------

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless connection via app with Bluetooth® 4.
x - basicDIM Wireless. Class II electrical, IP40_IP20,
Impact strength: IK03. Body: sheet steel, finished white
(close to RAL9016). Diffuser: UV-stabilised polycarbonate
hexagonal comfort optic with central control pod hole.
Equipped with presence detector and daylight harvesting
function for dimming control plus slaves via bluetooth.
Electrical connection via 7 pole piano key terminals, loop-
in/loop-out possible. Complete with VCT technology
(variable colour temperature), stepless tunable from 2700-
6500K, DT8., Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 57 mm
Luminaire input power: 39.8 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 95 lm/W
Weight: 5.52 kg

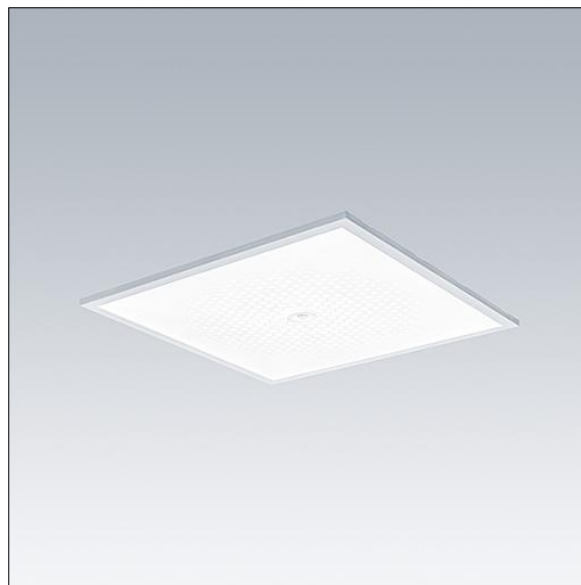

TLG_OMP2_F_QHPIR_PDB.jpg

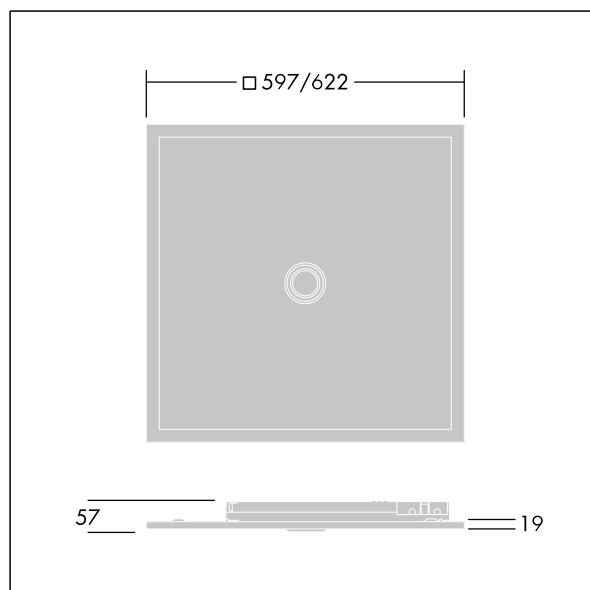

TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92913229 OP2 3800-927-65 CKIT+ HX BC PIR Q600

THORN