

Voyager Star

96633240 VOYAGER STAR P MSC ANT ECD SR

THORN




Voyager Star

High performance, surface mounted LED emergency lighting luminaire, Luminaire for central emergency light supply, for single luminaire monitoring via DALI (DALI-2 certified), settable emergency light level with optic. Luminaire in maintained mode. Housing: die-cast aluminium, powder coated silver grey (close to RAL 9006). Gear tray: galvanised sheet steel. Lens: polycarbonate. IP40, Ceiling surface-mounted luminaire. Luminaire can be installed quickly and maintained without tools. Electrical connection (230VAC) via maximum 2.5mm² cable, loop in - loop out possible. Optimum thermal management via heat sink. Maintained and non-maintained mode: -30°C to +35°C; power supply: 220-240 V AC (+/- 10%) 50-60 Hz; 176-280 V DC Complete with LEDs..

Luminaire input power: 3.7 W
Dimensions: 146 x 146 x 34 mm
Weight: 0.65 kg



TLG_VSTR_F_MSC_side_ECx_ANT_SR.jpg

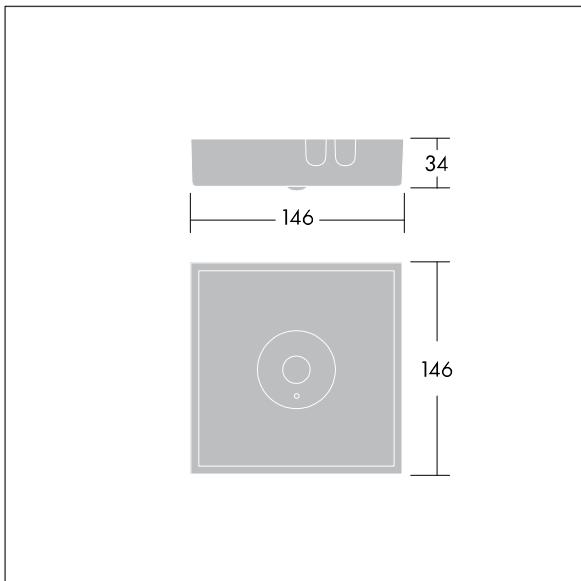

TLG_VYLD_M_MCE AREA.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Voyager Star

96633240 VOYAGER STAR P MSC ANT ECD SR

THORN