

# Voyager Star

96633245 VOYAGER STAR P MSC ESC ECP SR

THORN



## Voyager Star

High performance, surface mounted LED emergency lighting luminaire, Luminaire for central emergency light supply, for single monitoring of the luminaire via Powerline in connection with the eBox System, settable emergency light level with optic. Luminaire in maintained mode.

Housing: die-cast aluminium, powder coated silver grey (close to RAL 9006). Gear tray: galvanised sheet steel. Lens: polycarbonate. IP40, Ceiling surface-mounted luminaire. Luminaire can be installed quickly and maintained without tools. Electrical connection (230VAC) via maximum 2.5mm<sup>2</sup> cable, loop in - loop out possible. Optimum thermal management via heat sink. Maintained and non-maintained mode: -30°C to +35°C; power supply: 220-240 V AC (+/- 10%) 50-60 Hz; 176-280 V DC Complete with LEDs..


Luminaire input power: 3.6 W

Dimensions: 146 x 146 x 34 mm

Weight: 0.65 kg



TLG\_VSTR\_F\_MSC\_side\_ECx\_ESC\_SR.jpg

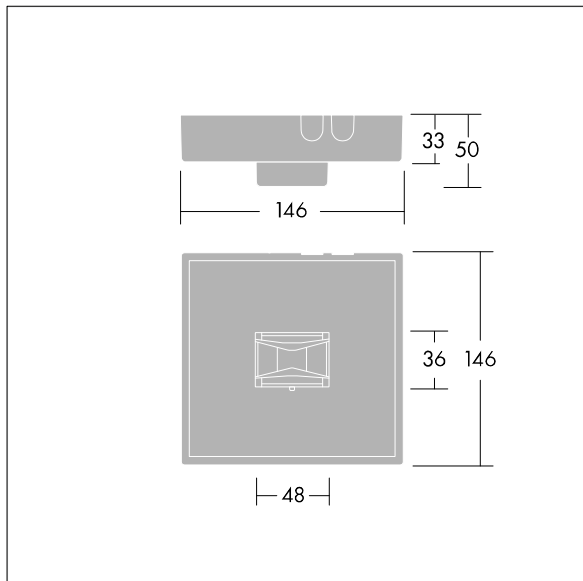

TLG\_VYLD\_M\_MCE ROUTE.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Voyager Star

96633245 VOYAGER STAR P MSC ESC ECP SR

THORN