

96633050 DUROLIGHT-R 5300-840 HF L1550

IP65	IK10					850°C		170Nm	T _a -25 +50
------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-----------------------------------------------------------------------------------	-------	---------------------------

Durolight

Anti-vandal Recessed LED luminaire. Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1525 x 300 x 115 mm

Luminaire input power: 46.7 W


Luminaire luminous flux: 5246 lm

Luminaire efficacy: 112 lm/W

Weight: 17 kg



TLG_DURO_F_MRE.jpg

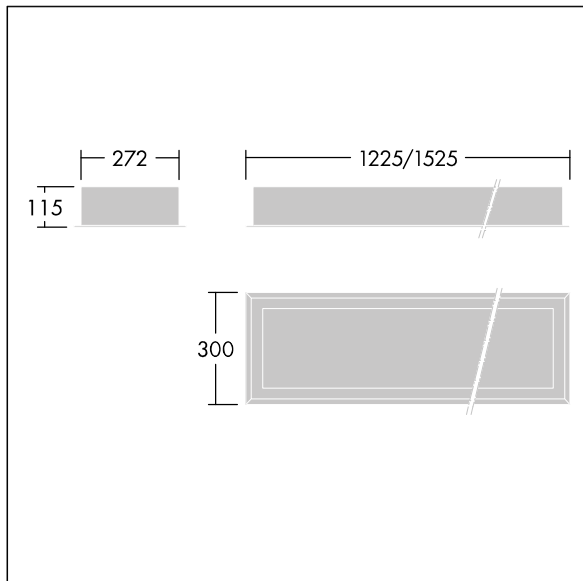

TLG_DURO_M_LDR.wmf

This product contains a light source of energy efficiency class C.

Durolight

96633050 DUROLIGHT-R 5300-840 HF L1550

THORN