

## 96633062 DUROLIGHT-S 5200-840 HF L1650

IP65	IK10					850°C		170Nm	T <sub>a</sub> -25 +50
------	------	--	--	--	--	-------	--	-------	---------------------------


### Durolight

Anti-vandal Surface mounted LED luminaire. Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1650 x 290 x 66 mm  
Luminaire input power: 46.7 W  
Luminaire luminous flux: 5210 lm  
Luminaire efficacy: 112 lm/W  
Weight: 18 kg



TLG\_DURO\_F\_MCE.jpg

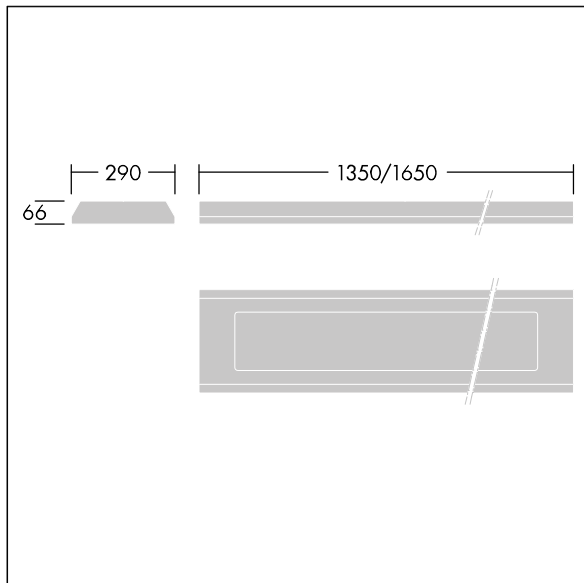

TLG\_DURO\_M\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Durolight**

**96633062 DUROLIGHT-S 5200-840 HF L1650**

**THORN**