

96633069 DUROLIGHT-S 4100-840 HF E3 L1350

| | | | | | | | | |
|------|------|--|--|--|--|-------|--|---------------------------|
| IP65 | IK10 | | | | | 850°C | | T _a -25 +50 |
|------|------|--|--|--|--|-------|--|---------------------------|


Durolight

Anti-vandal Surface mounted LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1350 x 290 x 66 mm
 Luminaire input power: 38 W
 Luminaire luminous flux: 4100 lm
 Luminaire efficacy: 108 lm/W
 Weight: 15 kg



TLG_DURO_F_MCE.jpg

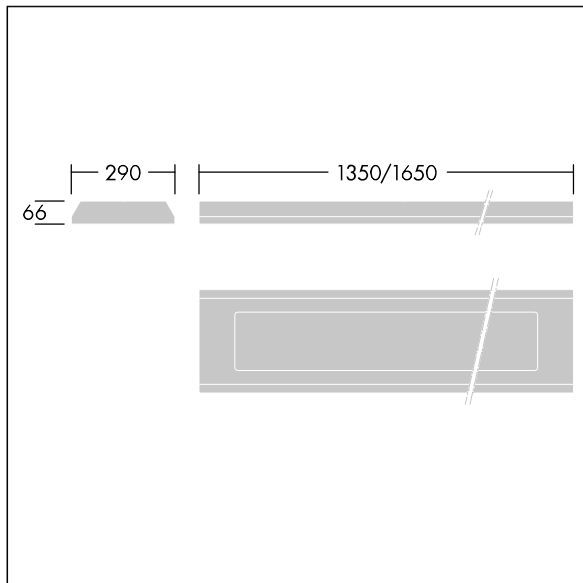

TLG_DURO_M_LDS.wmf

This product contains a light source of energy efficiency class C.