

Omega Pro 2

92915035 OP2 3800-840 MPT HFIX Q600 MRG


THORN

CB	IEC EN 60598-1 RG 0			IP20 ↑ IP40	IK03		CE		650°C	T _a 0 +35	
----	---------------------------	--	--	----------------	------	--	----	--	-------	-------------------------	--


Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, DALI-2 dimmable. Class II electrical,
IP40_IP20, Impact strength: IK03. Body: sheet steel,
finished white (close to RAL9016). Diffuser: UV-stabilised
polycarbonate microprismatic optic for maximised spacing.
Electrical connection via piano key terminals, loop-in/loop-
out possible. Supplied with safety wire. Complete with
4000K LED, Colour Rendering Index min.: 80

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 29.1 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 131 lm/W
Weight: 5.07 kg

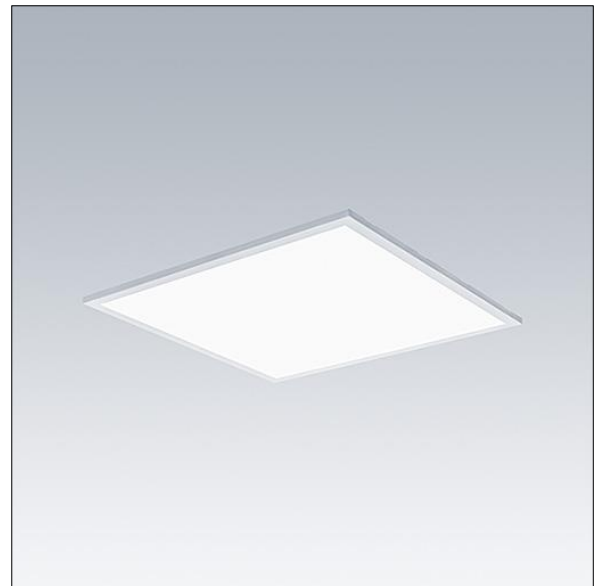

TLG_OMP2_F_QMPT_PDB.jpg

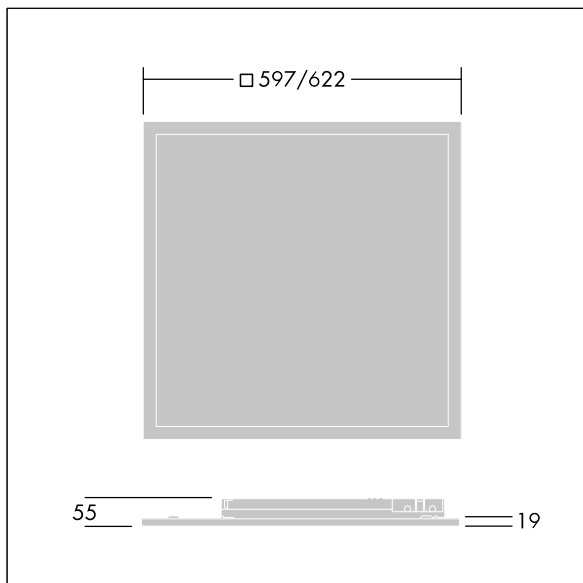

TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92915035 OP2 3800-840 MPT HFIX Q600 MRG

THORN