

# Omega Pro 2

92916308 OP2 3000-840 HX HFIX E3D 3X12

THORN

CB	IEC EN 60598-1 RG 0	11	IP20 ↑ IP40	IK03	CE	650°C	T <sub>a</sub> 0 +35
----	---------------------------	----	----------------	------	----	-------	-------------------------


## Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, DALI-2 dimmable with 3 hour, Self/DALI  
Addressable test, emergency lighting circuit. Class II  
electrical, IP40\_IP20, Impact strength: IK03. Body: sheet  
steel, finished white (close to RAL9016). Diffuser: UV-  
stabilised polycarbonate hexagonal comfort optic.  
Electrical connection via piano key terminals, loop-in/loop-  
out possible. Complete with 4000K LED, Colour Rendering  
Index min.: 80

Dimensions: 1197 x 297 x 57 mm  
Luminaire input power: 22.3 W  
Luminaire luminous flux: 3000 lm  
Luminaire efficacy: 135 lm/W  
Weight: 5.8 kg



TLG\_OMP2\_F\_RH\_PDB.jpg

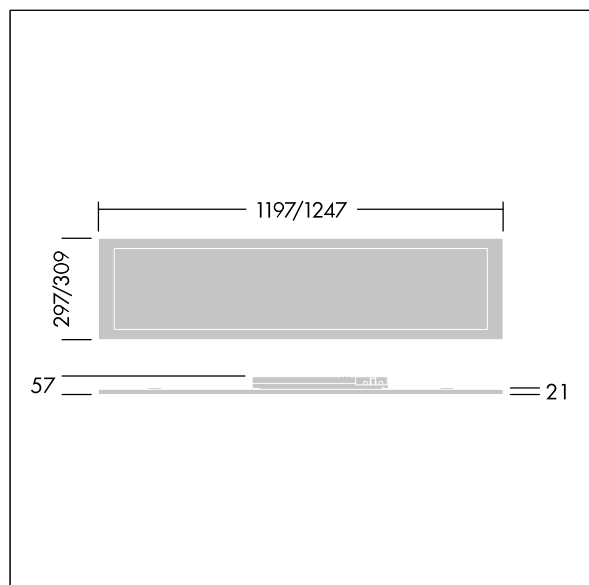

TLG\_OMP2\_M\_L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Omega Pro 2

92916308 OP2 3000-840 HX HFIX E3D 3X12

THORN