

# Contrast

96633669 CONT3 12L105-830 NB HFX SP BK

THORN

ISO 9223 C5		IP66	IK08					T <sub>a</sub> -20 +35
----------------	---	------	------	---	---	---	---	---------------------------

## Contrast


A medium architectural Bracket mounted LED floodlight with 12 LEDs driven at 1050mA and a narrow beam distribution. LED driver, DALI-2 dimmable. Class II electrical, IP66, IK08. Body: die-cast, powder coated, textured black (close to RAL9005). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with 3000K LED

,

Dimensions: Ø239 x 156 mm  
Luminaire input power: 41 W  
Luminaire luminous flux: 3891 lm  
Luminaire efficacy: 95 lm/W  
Weight: 5.07 kg



TLG\_CON3\_F\_S\_12L.jpg

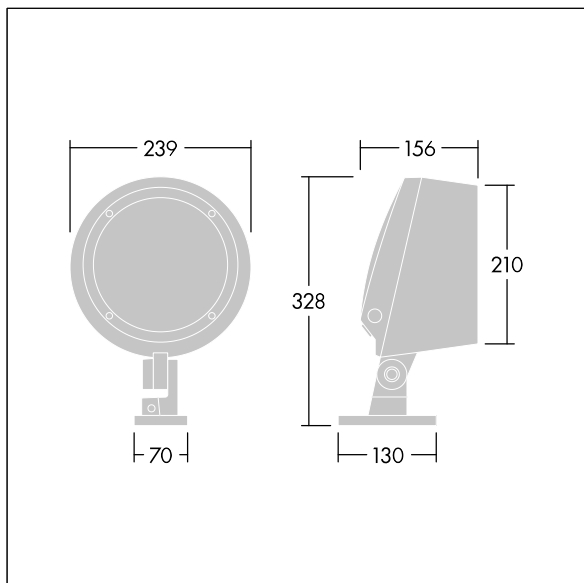

TLG\_CONL\_M\_12L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Contrast**

**96633669 CONT3 12L105-830 NB HFX SP BK**

THORN