

Omega Pro 2

92919900 OP2 4400-927-65 MPT HFIX E3D Q600


THORN

CB	IEC EN 60598-1 RG 0				IP20 ↑ IP40	IK03		CE				650°C	T _a 0 +35	
----	---------------------------	--	--	--	----------------	------	--	----	--	--	--	-------	-------------------------	--


Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class II electrical, IP40_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate opal optic for wide light distribution. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 90

Dimensions: 597 x 597 x 57 mm
Luminaire input power: 48.2 W
Luminaire luminous flux: 4250 lm
Luminaire efficacy: 88 lm/W
Weight: 5.92 kg

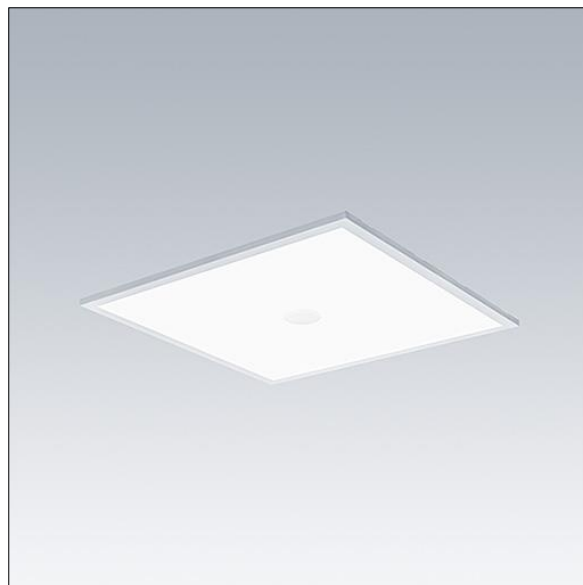

TLG_OMP2_F_QMPTKIT_PDB.jpg

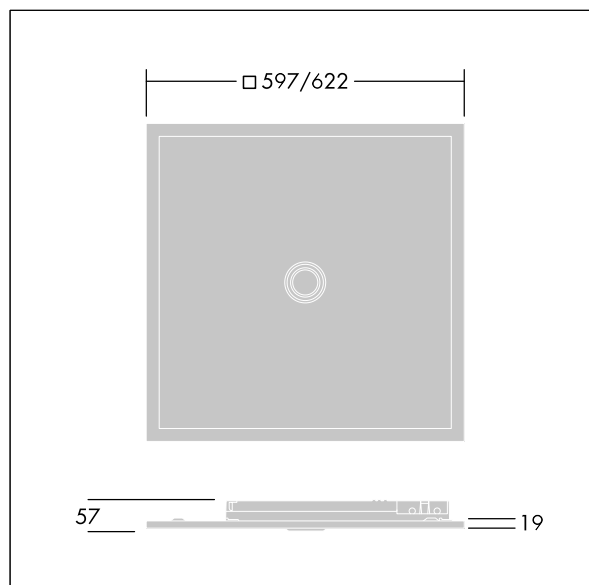

TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92919900 OP2 4400-927-65 MPT HFIX E3D Q600

THORN