

# Omega Pro 2

92920665 OP2 3800-927-65 CKIT MPT BC 3X12D

THORN

|    |                           |  |  |      |  |  |  |  |       |                         |  |
|----|---------------------------|--|--|------|--|--|--|--|-------|-------------------------|--|
| CB | IEC EN<br>60598-1<br>RG 0 |  |  | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+35 |  |
|----|---------------------------|--|--|------|--|--|--|--|-------|-------------------------|--|

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, Wireless connection via app with Bluetooth® 4.  
x - basicDIM Wireless. Class II electrical, IP40\_IP20,  
Impact strength: IK03. Body: sheet steel, finished white  
(close to RAL9016). Diffuser: UV-stabilised polycarbonate  
microprismatic optic for maximised spacing. Electrical  
connection via 7 pole piano key terminals, loop-in/loop-out  
possible. Complete with VCT technology (variable colour  
temperature), stepless tunable from 2700-6500K, DT8.,  
Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1247 x 309 x 57 mm  
Luminaire input power: 39.8 W  
Luminaire luminous flux: 3800 lm  
Luminaire efficacy: 95 lm/W  
Weight: 6.1 kg



TLG\_OMP2\_F\_RMPT\_PDB.jpg

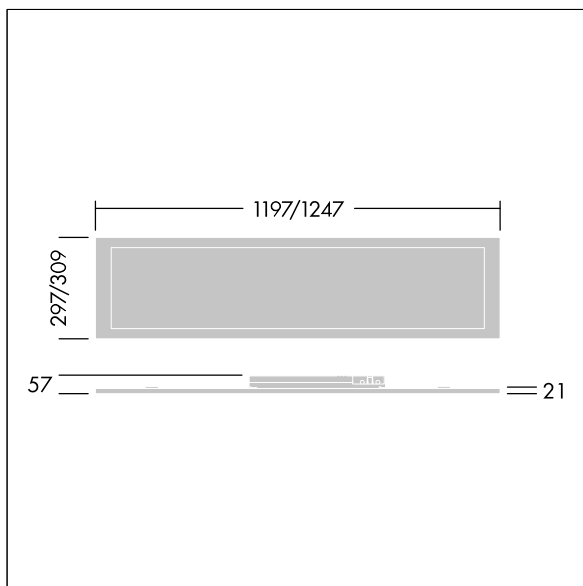

TLG\_OMP2\_M\_L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Omega Pro 2

92920665 OP2 3800-927-65 CKIT MPT BC 3X12D

THORN