

Omega Pro 2

92920666 OP2 3800-927-65 CKIT+ MPT BC PIR 3X12D

THORN

CB	IEC EN 60598-1 RG 0			IK03					650°C	T _a 0 +35	
----	---------------------------	--	--	------	--	--	--	--	-------	-------------------------	--

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless connection via app with Bluetooth® 4.x - basicDIM Wireless. Class II electrical, IP40_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing with central control pod hole. Equipped with presence detector and daylight harvesting function for dimming control plus slaves via bluetooth. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with VCT technology (variable colour temperature), stepless tunable from 2700-6500K, DT8., Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1247 x 309 x 59 mm
Luminaire input power: 39.8 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 95 lm/W
Weight: 6.14 kg



TLG_OMP2_F_RMPTKIT_PDB.jpg

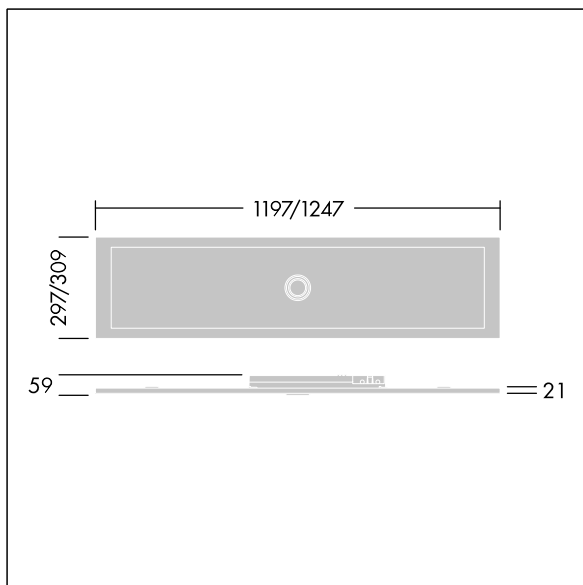

TLG_OMP2_M_LKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92920666 OP2 3800-927-65 CKIT+ MPT BC PIR 3X12D

THORN