

# Omega Pro 2

92920672 OP2 4400-927-65 CKIT+ MPT BC PIR 3X12D

THORN

CB	IEC EN 60598-1 RG 0			IK03			650°C	T <sub>a</sub> 0 +35
----	---------------------------	--	--	------	--	--	-------	-------------------------

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, Wireless connection via app with Bluetooth® 4.  
x - basicDIM Wireless. Class II electrical, IP40 IP20,  
Impact strength: IK03. Body: sheet steel, finished white  
(close to RAL9016). Diffuser: UV-stabilised polycarbonate  
microprismatic optic for maximised spacing with central  
control pod hole. Equipped with presence detector and  
daylight harvesting function for dimming control plus slaves  
via bluetooth. Electrical connection via 7 pole piano key  
terminals, loop-in/loop-out possible. Complete with VCT  
technology (variable colour temperature), stepless tunable  
from 2700-6500K, DT8., Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1247 x 309 x 59 mm  
Luminaire input power: 48.2 W  
Luminaire luminous flux: 4450 lm  
Luminaire efficacy: 92 lm/W  
Weight: 6.1 kg



TLG\_OMP2\_F\_RMPTKIT\_PDB.jpg

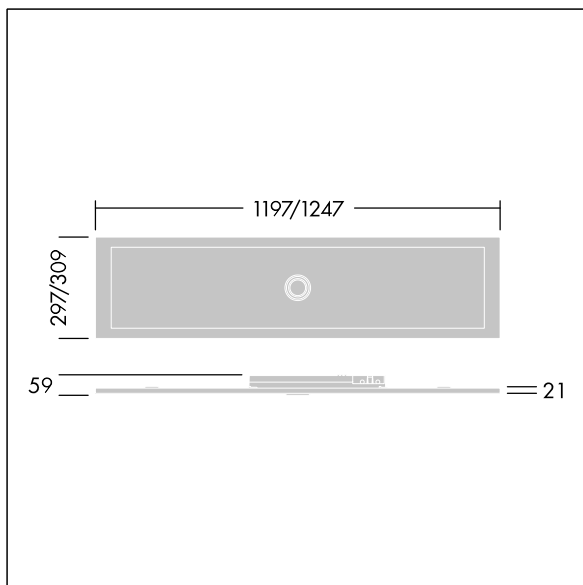

TLG\_OMP2\_M\_LKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## **Omega Pro 2**

**92920672 OP2 4400-927-65 CKIT+ MPT BC PIR 3X12D**

**THORN**