

96634289 CT S 24L105-730 NR CL2 T60F ANT

| | | | | | | | | | | |
|----------------|-----------|----------|------|------|----|------|------|-----|-------------------|--|
| ISO 9223 C5 | CEC 11 | UK CA | IP66 | IK08 | CE | RoHS | WEEE | LED | T _a 35 | |
|----------------|-----------|----------|------|------|----|------|------|-----|-------------------|--|

Carat


An elegant urban lantern with durable performance. Programmable LED driver, set for fixed output, driving 24 LEDs at 1,05A. Body: small size, die-cast aluminium (EN AC-44300), powder coated textured anthracite (close to RAL7043). Shaft: anthracite (close to RAL7043). Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70 Correlated colour temperature*: 3000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, T_a max.: 35°C. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: Ø435 x 81 mm
Luminaire input power: 79 W
Luminaire luminous flux: 9817 lm
Luminaire efficacy: 124 lm/W
Weight: 7 kg
Scx: 0.04 m²



TLG_CARA_F_S_PostTop.jpg

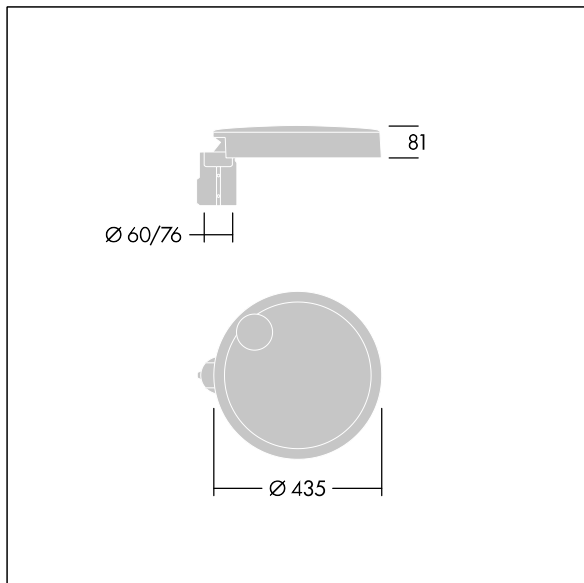

TLG_CARA_M_SMTP.wmf

This product contains a light source of energy efficiency class D.

Carat

96634289 CT S 24L105-730 NR CL2 T60F ANT

THORN