









96634053 KAT RD SE 2200-840 HFI

	IP65		IK10						850°C	T_a -15 +35	
---	------	---	------	---	---	---	---	---	-------	------------------	--


Katona

A round functional LED luminaire with deep body for side entry wiring capability, can be used with up to Ø20mm surface mounted conduit. DALI dimmable LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.

Dimensions: Ø328 x 84 mm
Luminaire input power: 22.1 W
Luminaire luminous flux: 2150 lm
Luminaire efficacy: 97 lm/W
Weight: 1.3 kg

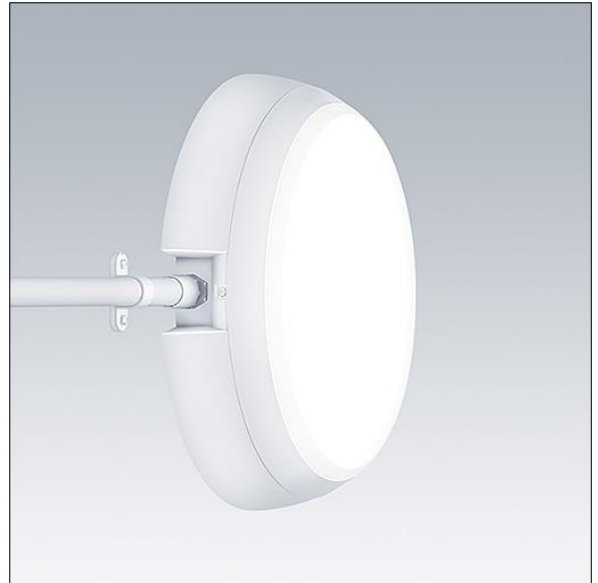

TLG_KATO_F_RD_deep_PDB.jpg

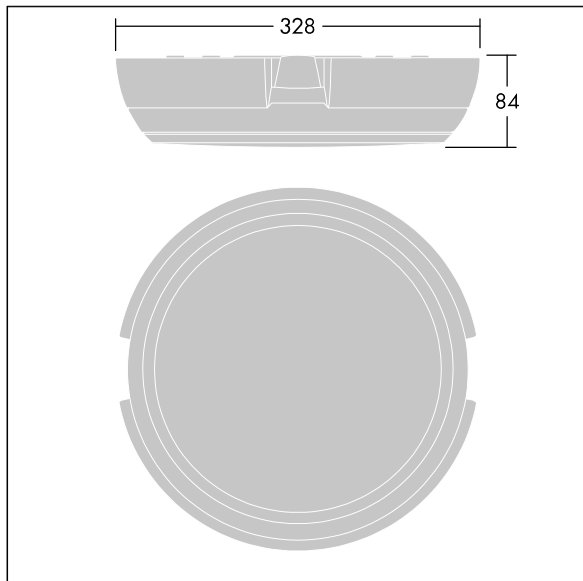

TLG_KATO_M_RD_FRAME_LDS.wmf

This product contains a light source of energy efficiency class C.