









## 96634053 KAT RD SE 2200-840 HFI

	IP65		IK10					850°C		T <sub>a</sub> -15 +35
---	------	---	------	---	---	---	---	-------	---	---------------------------


### Katona

A round functional LED luminaire with deep body for side entry wiring capability, can be used with up to Ø20mm surface mounted conduit. DALI dimmable LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm<sup>2</sup>. BESA compatible.

Dimensions: Ø328 x 84 mm  
Luminaire input power: 22.1 W  
Luminaire luminous flux: 2150 lm  
Luminaire efficacy: 97 lm/W  
Weight: 1.3 kg

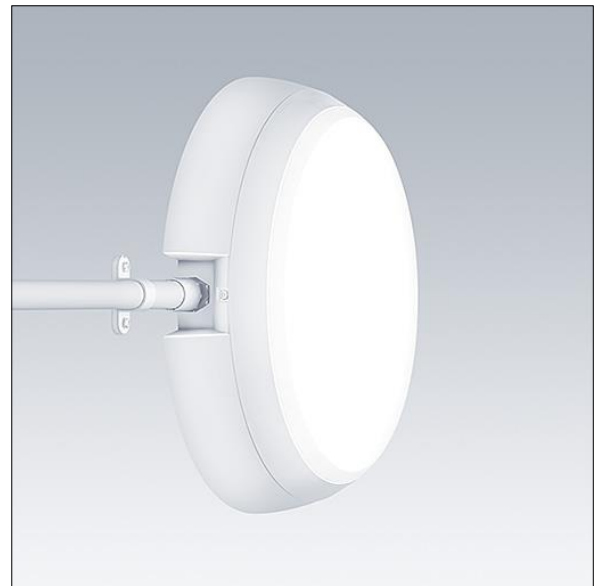

TLG\_KATO\_F\_RD\_deep\_PDB.jpg

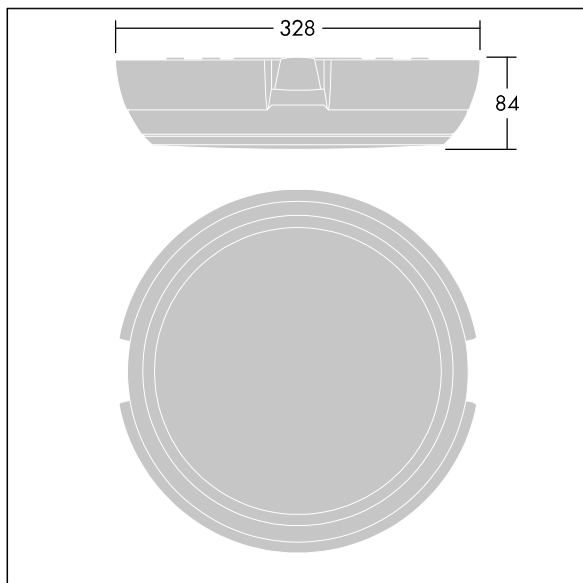

TLG\_KATO\_M\_RD\_FRAME\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Katona**

**96634053 KAT RD SE 2200-840 HFI**

THORN