

# IQ Beam

THORN

## 92926487 IQ BEAM 3000-840 MPT-F SENS E3 Q600

IEC EN 60598-1 RG 1		IP20	IK03					650°C	T <sub>a</sub> 0 +35
---------------------------	---	------	------	---	---	---	---	-------	-------------------------


### IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. Dimmable (via LITECOM), LED driver with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic with diffusing foil. Suitable for lay-in installation, pull up installation optional. Equipped with presence detector and daylight harvesting for use with LITECOM. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm  
Luminaire input power: 24.7 W  
Luminaire luminous flux: 3000 lm  
Luminaire efficacy: 121 lm/W  
Weight: 4.6 kg



TLG\_IQBM\_F\_pers\_B.jpg

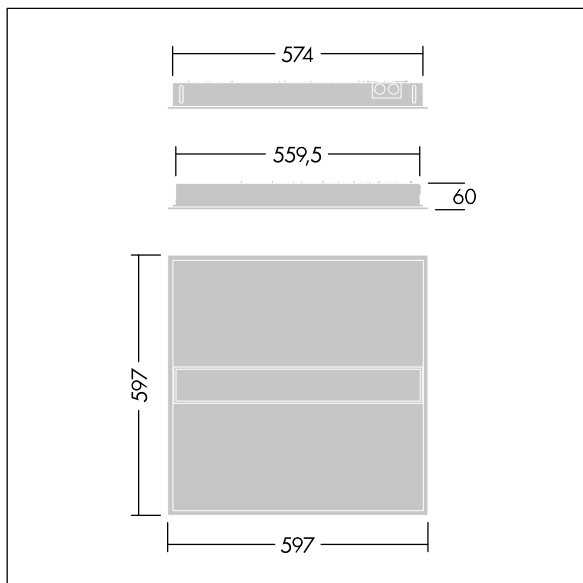

TLG\_IQBM\_M\_LDQ.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**IQ Beam**

**92926487 IQ BEAM 3000-840 MPT-F SENS E3 Q600**

**THORN**