

## 96635044 CETUS3 M 2000-840 EHF RWH




### Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44 IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

Dimensions: Ø195 x 100 mm  
 Luminaire input power: 16.3 W  
 Luminaire luminous flux: 2048 lm  
 Luminaire efficacy: 126 lm/W  
 Weight: 0.67 kg



TLG\_CTU3\_F\_M\_LED\_RWH\_Persp.jpg

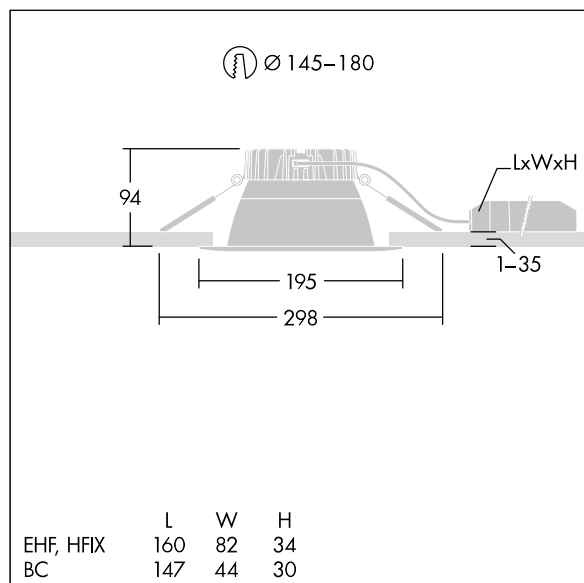

TLG\_CTU3\_M\_EHFM.wmf

This product contains a light source of energy efficiency class C.

**Cetus**

**96635044 CETUS3 M 2000-840 EHF RWH**

**THORN**