

Cetus

96635050 CETUS3 M LCS EHF RWH

IEC EN 60598-1 RG 1	UK CA	11	IP20 IP44	halogen	IK03		CE		EAC			850°C	T _a -20 +25	
---------------------	-------	----	--------------	---------	------	--	----	--	-----	--	--	-------	---------------------------	--

Cetus


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44 IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm.

Equipped with LCS technology, with two lumen outputs (2000lm and 3400lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø195 x 100 mm
Luminaire input power: 26.9 W
Luminaire luminous flux: 3221 lm
Luminaire efficacy: 120 lm/W
Weight: 0.69 kg



TLG_CTU3_F_M_LED_RWH_Persp.jpg

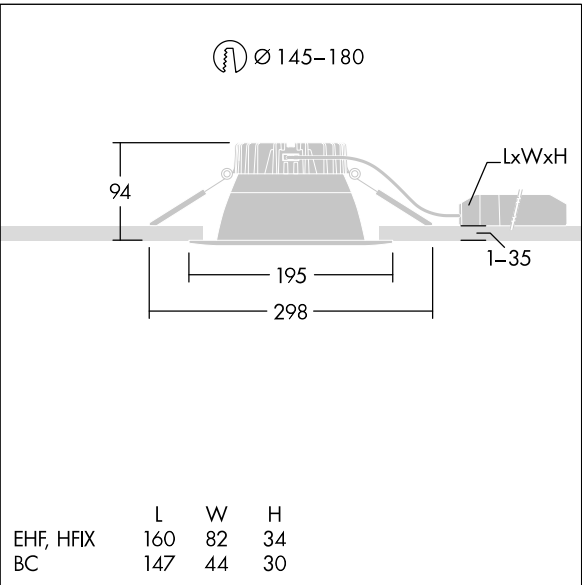

TLG_CTU3_M_EHFM.wmf

This product contains a light source of energy efficiency class D.

Cetus

96635050 CETUS3 M LCS EHF RWH

THORN