

## 96635147 CT S 24L35-730 NR CL1 T76F ANT

ISO 9223 C5	PLUG X 11 *	ida DAK SKY APPROVED	UK CA	11	IP66	IK08	⏏	CE	⚡	☀️	⚙️	T <sub>a</sub> 35	
----------------	----------------	-------------------------	----------	----	------	------	---	----	---	----	----	-------------------	--

### Carat


An elegant urban lantern with durable performance. Programmable LED driver, set for fixed output, driving 24 LEDs at 350mA. Body: small size, die-cast aluminium (EN AC-44300), powder coated textured anthracite (close to RAL7043). Shaft: anthracite (close to RAL7043). Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70 Correlated colour temperature\*: 3000 Kelvin LEDs supplied. Class I electrical, Impact strength: IK08, IP66, T<sub>a</sub> max.: 35°C. Supplied with Ø76mm spigot adaptor pre-fitted for post-top, 5° tilt.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: Ø435 x 81 mm  
Luminaire input power: 26 W  
Luminaire luminous flux: 3789 lm  
Luminaire efficacy: 146 lm/W  
Weight: 6.8 kg  
Scx: 0.04 m<sup>2</sup>



TLG\_CARA\_F\_S\_PostTop.jpg

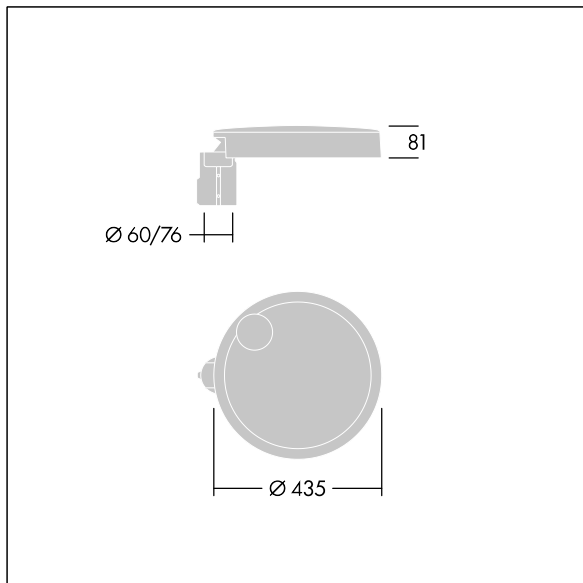

TLG\_CARA\_M\_SMTP.wmf

This product contains a light source of energy efficiency class D.

**Carat**

**96635147 CT S 24L35-730 NR CL1 T76F ANT**

**THORN**