

## 96635155 CT S 36L80-730 NR CL1 T76F ANT

|                |              |                         |          |    |      |      |   |    |   |    |    |                   |  |
|----------------|--------------|-------------------------|----------|----|------|------|---|----|---|----|----|-------------------|--|
| ISO 9223<br>C5 | PLUG<br>X 11 | ida<br>DAK SKY APPROVED | UK<br>CA | 11 | IP66 | IK08 | ⏏ | CE | ⚡ | ☀️ | ⚙️ | T <sub>a</sub> 35 |  |
|----------------|--------------|-------------------------|----------|----|------|------|---|----|---|----|----|-------------------|--|

### Carat


An elegant urban lantern with durable performance. Programmable LED driver, set for fixed output, driving 36 LEDs at 800mA. Body: small size, die-cast aluminium (EN AC-44300), powder coated textured anthracite (close to RAL7043). Shaft: anthracite (close to RAL7043). Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70 Correlated colour temperature\*: 3000 Kelvin LEDs supplied. Class I electrical, Impact strength: IK08, IP66, T<sub>a</sub> max.: 35°C. Supplied with Ø76mm spigot adaptor pre-fitted for post-top, 5° tilt.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: Ø435 x 81 mm  
Luminaire input power: 86.5 W  
Luminaire luminous flux: 12260 lm  
Luminaire efficacy: 142 lm/W  
Weight: 7.4 kg  
Scx: 0.04 m<sup>2</sup>



TLG\_CARA\_F\_S\_PostTop.jpg

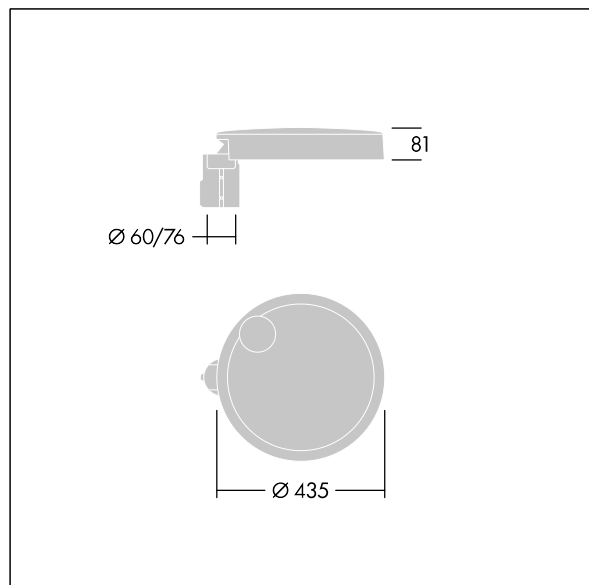

TLG\_CARA\_M\_SMTP.wmf

This product contains a light source of energy efficiency class D.

**Carat**

**96635155 CT S 36L80-730 NR CL1 T76F ANT**

**THORN**