


## Omega Pro 2

**92921164 OP2 3000-840 CKIT+ MPT E3 Q600**

+ ANT: open area emergency optic



### Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable with 3 hour, manual test, emergency lighting circuit. Class II electrical, IP40\_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Dimensions: 597 x 597 x 57 mm  
 Luminaire input power: 23.7 W  
 Luminaire luminous flux: 3000 lm  
 Luminaire efficacy: 127 lm/W  
 Weight: 5.86 kg

Equipped with:  
 Optics transparent polycarbonate lens for anti-panic emergency lighting. Set of three lenses supplied with the luminaire.



TLG\_OMP2\_F\_QMPTKIT\_PDB.jpg

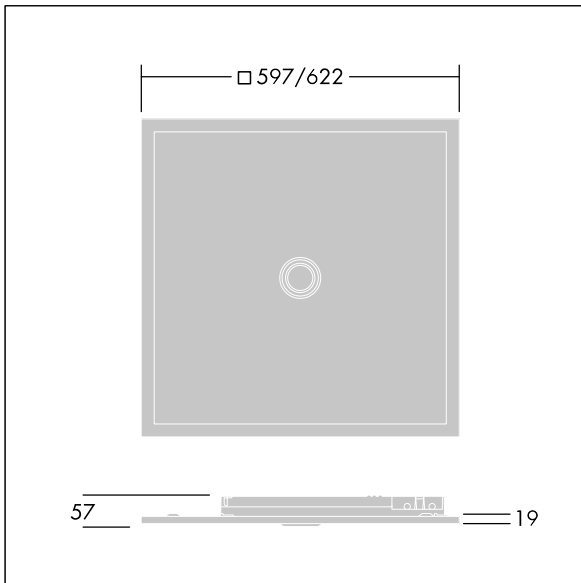

TLG\_OMP2\_M\_QKIT.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

# Omega Pro 2

**92921164 OP2 3000-840 CKIT+ MPT E3 Q600**

+ ANT: open area emergency optic

THORN