

## 92943846 CETUS3 M 2000-830 HF E3D RWH

IEC EN 60598-1 RG 1	UK CA	X	IP20 ↑ IP43	halogen	IK03		CE		EAC			850°C	T <sub>a</sub> 5 25	
------------------------	----------	---	----------------	---------	------	--	----	--	-----	--	--	-------	------------------------	--

### Cetus


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP43\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 3000K LED

For installation in concrete ceilings please contact sales

Dimensions: Ø195 x 100 mm  
 Luminaire input power: 15.5 W  
 Luminaire luminous flux: 1965 lm  
 Luminaire efficacy: 127 lm/W  
 Weight: 1.07 kg



TLG\_CTU3\_F\_M\_LED\_RWH\_Persp.jpg

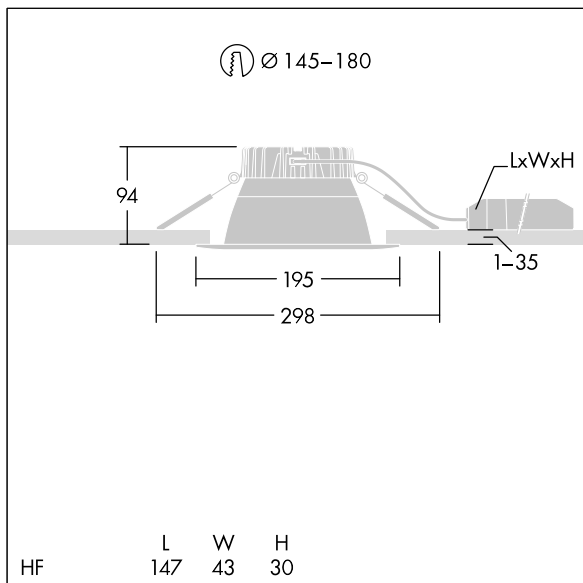

TLG\_CTU3\_M\_HFM.wmf

This product contains a light source of energy efficiency class D.

**Cetus**

**92943846 CETUS3 M 2000-830 HF E3D RWH**

**THORN**