

## 92943855 CETUS3 S 1500-830 HFIX RWH




### Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm. Complete with 3000K LED

Dimensions: Ø137 x 80 mm  
 Luminaire input power: 14.2 W  
 Luminaire luminous flux: 1450 lm  
 Luminaire efficacy: 102 lm/W  
 Weight: 0.44 kg



TLG\_CTU3\_F\_S\_LED\_RWH\_Persp.jpg

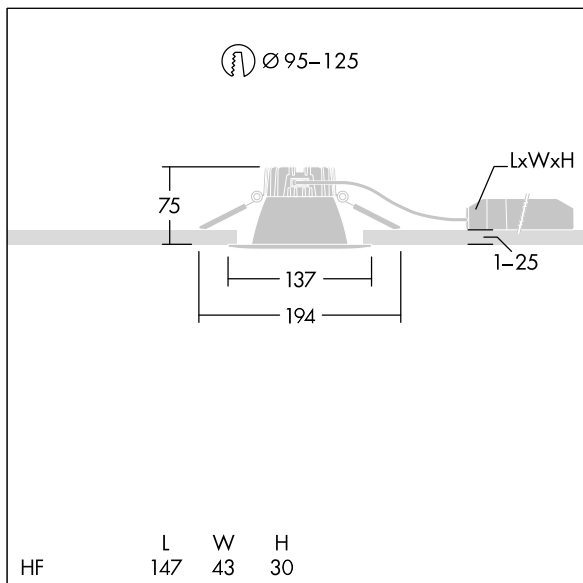

TLG\_CTU3\_M\_HFS.wmf

This product contains a light source of energy efficiency class D.

**Cetus**

**92943855 CETUS3 S 1500-830 HFIX RWH**

THORN