

92943886 CETUS3 M 3000-840 HFIX E3D RWH

| | | | | | | | | | | | | | | |
|------------------------|----------|---|----------------|---------|------|--|----|--|-----|--|--|-------|------------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | X | IP20 ↑ IP43 | halogen | IK03 | | CE | | EAC | | | 850°C | T _a 5 25 | |
|------------------------|----------|---|----------------|---------|------|--|----|--|-----|--|--|-------|------------------------|--|

Cetus


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP43_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

For installation in concrete ceilings please contact sales

Dimensions: Ø195 x 100 mm
 Luminaire input power: 26.9 W
 Luminaire luminous flux: 3222 lm
 Luminaire efficacy: 120 lm/W
 Weight: 1.21 kg



TLG_CTU3_F_M_LED_RWH_Persp.jpg

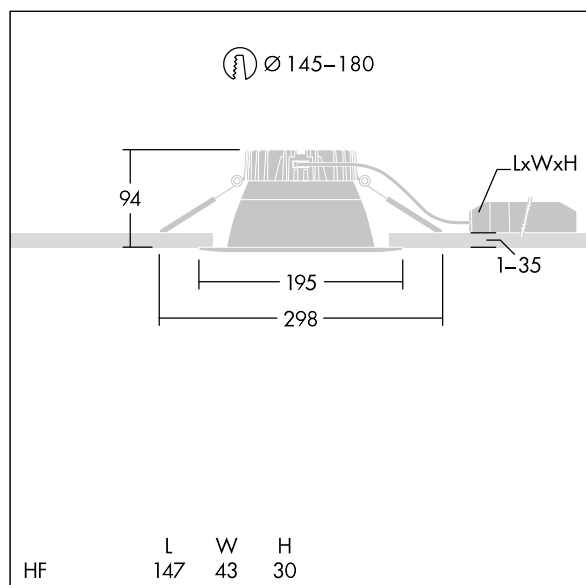

TLG_CTU3_M_HFM.wmf

This product contains a light source of energy efficiency class C.