

92943889 CETUS3 S 1500-840 HFIX RWH

IEC EN 60598-1 RG 1	UK CA	11	IP20 IP44	halogen	IK06		CE	EAC		850°C	T _a -20 +25	
---------------------------	----------	----	--------------	---------	------	--	----	-----	--	-------	---------------------------	--


Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44_IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm. Complete with 4000K LED

Dimensions: Ø137 x 80 mm
 Luminaire input power: 14.2 W
 Luminaire luminous flux: 1511 lm
 Luminaire efficacy: 106 lm/W
 Weight: 0.44 kg



TLG_CTU3_F_S_LED_RWH_Persp.jpg

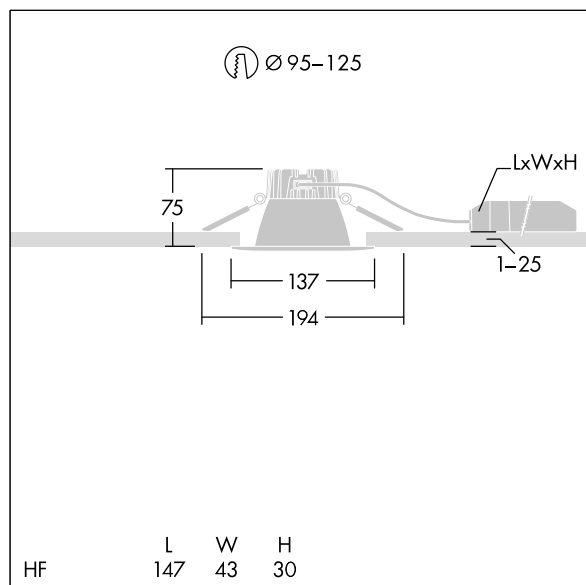

TLG_CTU3_M_HFS.wmf

This product contains a light source of energy efficiency class C.

Cetus

92943889 CETUS3 S 1500-840 HFIX RWH

THORN