

## 96635449 TR 12L35-740 NR CL2 FD T60E ANT

ISO 9223 C5		IP66	IK10						T <sub>a</sub> 25	
----------------	---	------	------	---	---	---	---	---	-------------------	--


### Thor

A small size, smart urban LED lantern with 12 LEDs driven at 350mA with narrow road optic and die-cast aluminium EN AC 47100 + CAT dome with anthracite finish (close to RAL7043). Class II electrical, IP66, IK10. Body: die-cast aluminium (EN AC 47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043), bracket: die-cast aluminium (EN AC-47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 6mm toughened flat glass. Screws and closing set: stainless steel. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Complete with 4000K LED.

Dimensions: 618 x 459 x 251 mm  
 Luminaire input power: 15 W  
 Luminaire luminous flux: 2076 lm  
 Luminaire efficacy: 138 lm/W  
 Weight: 8.65 kg  
 Scx: 0.038 m<sup>2</sup>



TLG\_THOR\_F\_SMTFPD.jpg

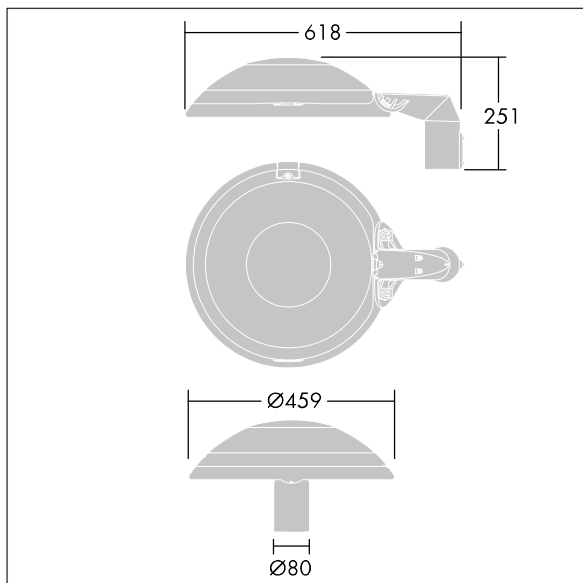

TLG\_THOR\_M\_MTP.wmf

This product contains a light source of energy efficiency class D.

**Thor**

**96635449 TR 12L35-740 NR CL2 FD T60E ANT**

**THORN**