

Contrast

96635773 CONT3 52L70 RGBW NB BC 6K ANT

THORN

| | | | | | | | | | |
|----------------|---|------|------|---|---|---|---|---|---------------------------|
| ISO 9223 C5 |  | IP66 | IK08 |  |  |  |  |  | T _a -20 +25 |
|----------------|---|------|------|---|---|---|---|---|---------------------------|

Contrast


A large architectural floodlight LED floodlight with 52 LEDs driven at 700mA and a narrow beam distribution. LED driver, Wireless connection via app with Bluetooth® 4.x - basicDIM Wireless. Class II electrical, IP66, IK08. Body: die-cast, powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with blue LED

,

Dimensions: Ø397 x 206 mm
Luminaire input power: 113 W
Luminaire luminous flux: 7211 lm
Luminaire efficacy: 64 lm/W
Weight: 12.56 kg



TLG_CON3_F_M_52L.jpg

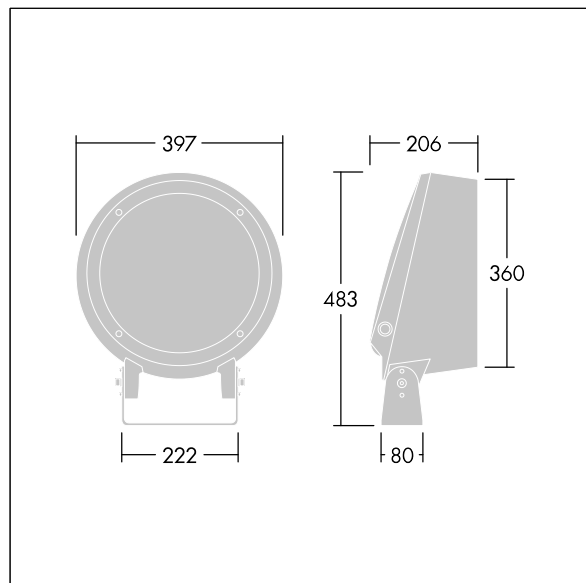

TLG_CONL_M_36-52L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Contrast

96635773 CONT3 52L70 RGBW NB BC 6K ANT

THORN