

## Candle

96679079 CN 18L25 730 RSC CL2 W3 ANT

ISO 9223 C5	IP66	IK10					T <sub>a</sub> 25
----------------	------	------	--	--	--	--	-------------------

### Candle

Slim lighting column with 18 LEDs driven at 250mA with Radial symmetrical comfort light distribution. Fixed output LED driver. Class II electrical, IP66, IK10. Base: die-cast aluminium (EN AC-44300). Finish: powder coated aluminium, texturized anthracite (close to RAL7043). Diffuser: UV stabilised clear polycarbonate. Pre-wired with 3m cable. Column to be ordered separately. Complete with 3000K LED.

Dimensions: Ø234 x 559 mm

Luminaire input power: 15 W


Weight: 4.84 kg

Scx: 0.06 m<sup>2</sup>

Luminaire efficacy: 104 lm/W



TLG\_CNDL\_F\_2.jpg

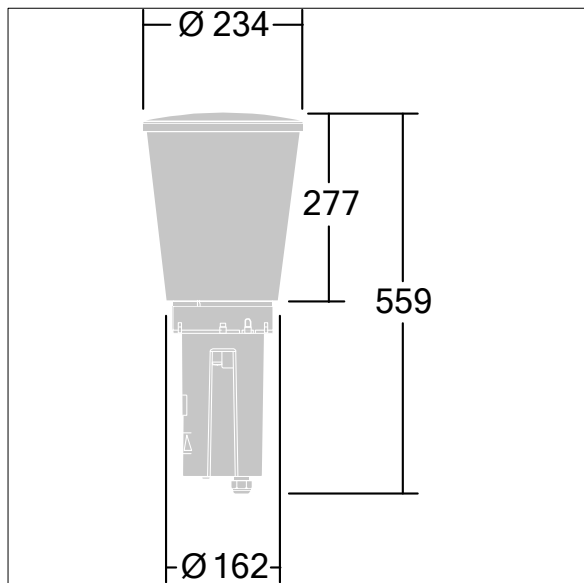

TLG\_CNDL\_M\_HEAD.wmf

This product contains a light source of energy efficiency class D.

# Candle

96679079 CN 18L25 730 RSC CL2 W3 ANT

THORN